
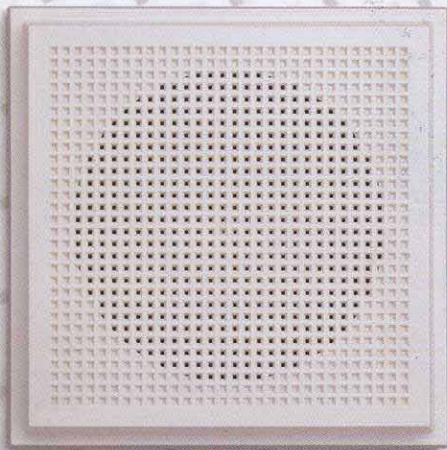


B 406 T

ABS SURFACE MOUNTING WALL LOUSPEAKERS

DNH ABS surface mounting wall loudspeaker

- Power 6 Watt
- 100V transformer
- SPL 1W/1m 90dB
- Dispersion (-6dB) 1kHz/4kHz 170°/50°
- Grey RAL 9002 colour



Frequency Response curves on page 76


	B 406 T
Code	10438
Characteristics	Loudspeaker with transformer
Mounting system	Screw fit
Rated/Maximum power	6/8 Watt
Colour	Grey
Frequency response	160÷14,000Hz
Sensitivity 1W/1m	90dB
Maximum SPL 1m	97dB
Weight	1.1 kg
Dimensions	210x210x66 mm

BLC 550 T

ABS SURFACE MOUNTING WALL LOUSPEAKERS

DNH ABS surface mounting wall or ceiling loudspeaker

- Power 6 Watt
- 100V transformer
- SPL 1W/1m 90dB
- Dispersion (-6dB) 1kHz/4kHz 170°/50°
- White RAL9010 colour



Frequency Response curves on page 76

	BLC 550 T
Code	09355
Characteristics	Loudspeaker with transformer
Mounting system	Screw fit
Rated/Maximum power	6/15 Watt
Colour	White
Frequency response	150÷15,000Hz
Sensitivity 1W/1m	90dB
Maximum SPL 1m	97dB
Weight	1.2 kg
Dimensions	ø 206x66 mm